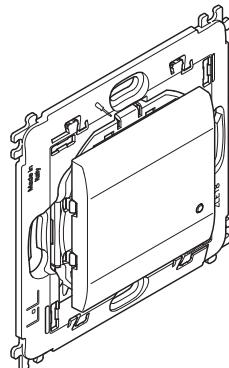


**LIVING-LIGHT
Wireless light switch****N4003CW - NT4003CW - L4003CW****Use**

It allows the ON/OFF control of one or more connected devices for the lighting control. Surface installation with repositionable stickers (supplied) or onto a flush mounting box. Integrated LED for low battery indication. Powered by battery 3V type CR2032 (supplied) with an autonomy of 8 years - 2 modules

Standards and approvals

The undersigned, BTICINO, declares that the radio-electric equipment type (N-NT-L4003CW) complies with directive 2014/53/EU.


The full text of the EU declaration of conformity is available on the following website: www.bticino.it/red

Range

Designation	Cat. Nos.
Wireless lighting and socket control, for ON/OFF, dimmer, centralisation function.	
Supplied complete with battery.	<input type="checkbox"/> N4003CW
Equipped with an LED indicator (configuration) and a RESET button (hidden) used to return to factory settings.	<input checked="" type="checkbox"/> NT4003CW
Repositionable self-adhesive fixings supplied.	<input type="checkbox"/> L4003CW

Colours code:

- White
- Silver
- Anthracite

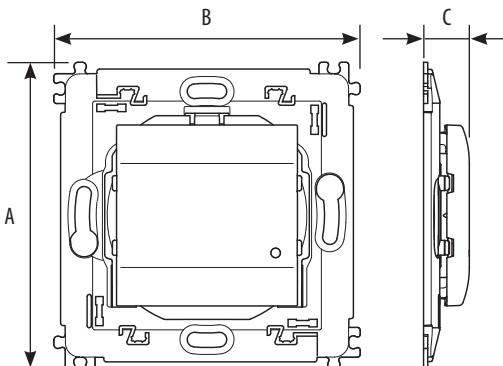Dimensions (mm)

A	B	C
74	74	11

Technical characteristics**- Mechanical characteristics**

Protection against impacts: IK 02

Protection against solid bodies/liquids: IP 20 without plate or rocker plate

- Material characteristics

Mechanism casing with grid: Fibreglass-reinforced (10%) PC

Mechanism functional cover: PC/ABS

Supporting base: fiberglass-reinforced PA (60%)

Halogen-free

UV resistant

Self-extinguishing: 650°C/30 s

- Electrical characteristics

Powered by a CR2032 - 3 V lithium battery (supplied)

Battery life: 8 years for 10 activations a day

ZigBee radio technology frequency: 2.4 GHz to 2.4835 GHz

Power level: REC 70-03: < 20 dBm

Wireless mesh network, self-adaptive and secure (AES 128), conforming to standard IEEE 802.15.4 (LR-WPAN)


- Climate characteristics

Usage temperature: +5°C to +45°C


Storage temperature: 0°C to +45°C

Operation

Front view

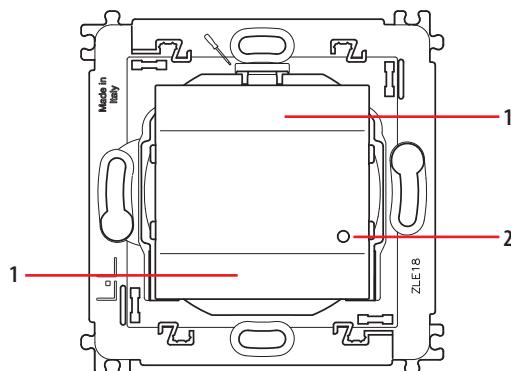

Front view without coverkey

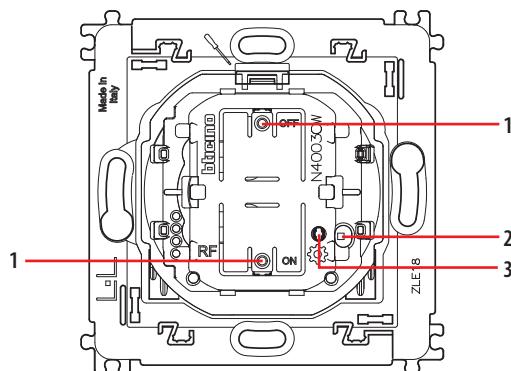

Legend

1. Control pushbutton
2. LED indicator: useful during installation
3. RESET button used to return to factory settings

Care

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Resistant to the following products: Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes

Caution: Always test before using special cleaning products.

The plates must not be painted.



Take care to recycle the battery appropriately.

RAEE/WEEE: bticino.com/disposal